











### Your Partner of Choice

Arlon, established in 1958 near Los Angeles, California, is a leading global manufacturer of pressure-sensitive adhesive vinyls for the sign and graphics industry.

As one of the world's most experienced casting companies, Arlon has gained a worldwide reputation for quality and innovation.

# WRAPITRIGHT WRAPITRIGHT

### **WRAPITRIGHT.COM**

**WrapItRight.com** gives you access to expert advice and tutorials from industry leaders and specialists!

- ▶ How-to video library featuring vehicle wraps, commercial signage, and digital printing techniques.
- ▶ Create custom playlists and watch videos later.
- ▶ Get updates on Trade Shows and Training Events.

Throughout this brochure you will see companion how-to videos featuring recommended methods and techniques. Videos can be accessed by using the QR-codes or visiting **wrapitright.com**.



### **EMEA CUSTOMER SERVICE:**

- arlonEuropeCS@arlon.com
- December 2015 Head Office: +31 70 354 4311





### Table of Contents

At-a-Glance Products Chart	4
Benefits of FLITE Technology®	6
Vehicle Films	10
Architectural Range	18
• Interior Wall Films	20
• Exterior Wall Films	22
• Window Films	24
• Floor Films	26
Commercial Films	30
Overlaminates	36

	C	ATE	GOF	RY						FILM				ı	ADH	IESI'	VE				SU	RF.	ACE	S			INK		
VEHICLE FILMS	INTERIOR WALL FILMS	EXTERIOR WALL FILMS	WINDOW FILMS	FLOOR FILMS	COMMERCIAL FILMS	NAME	DURABILITY UNPRINTED (IN YEARS)	туре	THICKNESS (IN MICRONS)	FINISH	FLITE TECHNOLOGY®	X-SCAPE TECHNOLGY®	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	SOLVENTS	à	LATEX
•						PREMIUM COLOUR CHANGE	10*	С	76- 84	G/M S	•		•		•		•	C/G/ W/S	•	•	•	•	•		•	•	N/A	N/A	N/A
•						SLX+®	10	С	50	G	•		•		•		•	LG	•	•	•	•	•		•	•	•	•	<b>(P)</b>
•						SLX® CAST WRAP	10	С	50	G	•		•		•		•	LG	•	•	•	•	•		•	•	•	•	
•						DPF V9700 V	12	PU	50	G	•		•		•		•	LG		•	•		•		•	•	•	•	<b>(</b>
•						DPF 6100XLP	10	С	50	G		•	•		•		•	LG	•	•	•	•	•		•	•	•	•	<b>(P)</b>
•					•	DPF 6000XRP	10	С	50	G		•	•		•		•	LG	•	•	•	•	•		•	•	•	•	<b>(P)</b>
•					•	DPF 6000RP WHITE	10	С	50	G			•		•			LG	•	•	•	•	•		•	•	•	•	<b>(</b>
•					•	DPF 6000RP CLEAR	7	С	50	G			•					С		•	•		•			•	•	•	•
•						FUSION WRAP	7	Р	60	G	•		•		•		•	LG	•	•	•		•		•	•	•	•	<b>(</b>
•					•	DPF 4650GLX	7	Р	70	G		•			•		•	LG	•	•	•				•	•	•	•	•
•				•	•	DPF 4600GLX	7	Р	80	G		•	•		••		•	LG	•	•	0. <del>*</del>				•	•	•	•	<b>(P)</b>
•						ILLUMINITE WRAP®	7	С	125	G	•		•				•	LG		•	•				•	•	•	•	<b>(</b>
•						DPF 2400XLP	7	С	125	G		•	•				•	LG	•	•	•				•	•	•	•	
•					•	DPF 2400	7	С	125	G			•					С	•	•					•	•	•		
•		•		•	•	DPF 8000™ ULTRA TACK WHITE	7	Р	90	S			•			•	•=	С	•	•			•	•	•	•	•	•	<b>(</b>
•					•	DPF 4550GTX/MTX	5	Р	70	G/M		•	•				•	LG	•						•	•	•	•	•
•					•	DPF 4550GT/MT	5	Р	70	G/M			•					LG	•						•	•	•	•	•
•					•	DPF 4550G	5	Р	70	G			•					С	•						•	•	•	•	•
			•		•	DPF 4500 Clear	5	Р	75	G			•					С	•						•	•	•	•	•
	•					DPF 4200	7	Р	150	M/C			•		•			С	•	•			•		•		•	•	1
	•				•	DPF 4300	4	Р	86	М				•	•			С	•						•	•	•	•	•
	•			•	•	DPF 510 ULTRA TACK	3	М	100	G/M			•			•		C/LG	•						•	•	•		•
					•	DPF 8000™ ULTRA TACK CLEAR	7	Р	75	L			•			•		С	•	•			•	•	•	•	•	•	•
		•		•	•	DPF 8200 HIGH TACK	7	Р	90	S			•			•		С	•	•			•	•	•	•	•	•	<b>(P)</b>
		•			•	DPF 8200X HIGH TACK	7	Р	90	S		•	•			•	•	С	•	•			•	•	•	•	•	•	<b>(</b>
			•		•	DPF 5450X	5/3▼	P	80	EG		•	•				•	С	•						•	•	•	•	•
			•			SERIES 5400	5/2▼	Р	80	М			•					С	•						•	•	N/A	N/A	N/A
			•			DPF 50WD WHITE/CLEAR	2/1▼	Р	90 100	G/M				•	•			С	•							•	•	•	•
			•			DPF 45WF	1	М	150	S					•			С	•							•	•	•	•
					•	DPF 510G/M	3	М	100	G/M			•					С	•						•	•	•		•
				•	•	DPF 510GTR/MTR	3	М	100	G/M				•				LG	•							•	•		•
				•	•	DPF 510GT/MT	3	М	100	G/M			•					LG	•						•	•	•		•

CATEGORY				FILM			ļ	ADH	ESIVI	=				SL	JRF	AC	ES		
OVERLAMINATES		DURABILITY UNPRINTED (IN YEARS)		THICKNESS (IN MICRONS)			REMOVABLE	AN REMOVING	H/ULTRA TACK		LOR		FT CURVES	COMPOUND CURVES	P CHANNELS	rextured	LOW ENERGY SURFACES	OOR	OUTDOOR
OVE	NAME	DUR (IN)	TYPE	THIC	FINISH	PER	REM	CLE	E	AIR-	COL	FLAT	SOF	COM	DEEP	TEX	ГОМ	INDOOR	OUT
•	SERIES 3170	7	С	35	G	•					С	•	•	•		•		•	•
•	SERIES 3200	7	С	50	G	•					С	•	•	•	•	•		•	•
•	SERIES 3210	7	С	35	G	•					С	•	•	•	•	•		•	•
•	SERIES 3220	7	С	50	G/M	•					С	•	•	•	•			•	•
•	SERIES 3270	7	С	50	G/M	•					С	•	•	•	•	•		•	•
•	SERIES V3370 V	12	PU	38	G	•					С	•	•	•	•	•		•	•
•	SERIES 3310 V	10	PU	38	G	•					С	•		•		•		•	•
•	SERIES 3420	5	Р	75	G/M/S	•					С	•						•	•
•	SERIES 3450	5	Р	80	G/M	•					С	•						•	•
•	SERIES 3460	7	Р	55	G/M	•					С	•						•	•
•	SERIES 3510	3	М	80	G/M	•					С	•						•	•
•	SERIES 3350	10	PVDF	50	S	•					С	•						•	•
•	PROTEC SERIES 3960	2	М	305	G	•					С	•	•					•	•

### **ARLON DICTIONARY:**

**Permanent Adhesives:** Designed for short, medium and long-term applications.

May need heat and/or chemicals to be removed.

Designed for short-term applications. Can be removed without heat or chemicals, with little or no adhesive left behind. Removable Adhesives:

**Clean Removing Adhesives:** An added feature of some permanent adhesives. Up to 30%

of adhesive may stay behind during film removal.

Air channels in the adhesive that allows air to release when bubbles are formed. Air-Egress:

Helps for an easier installation. The adhesive used could be permanent or removable.

### **CHART CAPTION:**

### **DURABILITY:**

▼Years durability for outdoor applications

\* Premium Colour Change is rated for an outdoor durability of up to 10 years. For additional details, please see Arlon's Warranty

C: Cast P: Polymeric M: Monomeric PU: Polyurethane PVDF: Polyvinylidene fluoride (PVC free) PP: Polypropylene PL: Polyester

G: Gloss finish M: Matte finish S: Satin finish L: Luster EG: Etched glass finish P: Pebble finish C: Canvas

FLITE Technology®: FLITE Technology®: X-Scape Technology®: X-Scape®

■: Available for special order, please refer to your Arlon Business Development Manager LG: Light Grey Adhesive C: Clear Adhesive **G:** Grey Adhesive **W:** White Adhesive **S:** Silver Adhesive

\*: Clean removing is only for vehicle applications

### **SURFACES:**

♣: Only with overlaminate Series 3170

Solvent: Printable with solvent and eco-solvent inks Latex: The logo means the film is certified for HP Latex Inks

### **OVERLAMINATES (in the catalogue):**

★: Recommended overlaminate

### **PVC FREE:**

Environmentally Friendly

### HOW DOES YOUR BUSINESS BENEFIT FROM

### FLITE TECHNOLOGY®?



FLITE Technology® is a lite contact, repositionable system based on a unique adhesive and liner combination. An installer will experience the easiest to apply products in the market.

### **25% FASTER**

FLITE Technology® wrap films allow you to get a vehicle wrapped up to 25% faster compared to other films. Applications on flat surfaces can be done even up to 40-50% faster!

### A REAL MONEY-SAVER

Finishing applications faster means more vehicles wrapped in the same time. FLITE Technology® saves a a lot of time per vehicle: reduced labor costs will enable your business to thrive.



### FLITE Technology® wrap films offer:

- ▶ Superior Repositionability
- → Vibrant & Reliable Print Quality
- ▶ Long Term Bond
- ▶ High Durability
- ▶ Easy & Clean Removability

### **IMPRESS YOUR CUSTOMERS**

With FLITE Technology® wrap films you save time and money, which allows you to lower the costs and offer more competitive pricing to your customers. Your customers will love the precise, vibrant graphics and when it comes to removing the film again you will love the easy and clean removability. The wrapping process will have increased efficiency and amongst other reduce the downtime of fleet which your clients will highly value!

### **MAXIMUM PRECISION**

No more frustration when the graphics need to be repositioned on the vehicle! Applied areas of FLITE Technology® wrap films can be lifted again and again for repositioning until the graphics are precisely in the right place!

Once the graphics are in the right place they will stay put, even in deep channels and complex curves.

### IT TAKES ONLY ONE

The effortless removal of the liner of FLITE Technology® films reveals the light grey opaque adhesive. The adhesive is non-static, thus does not attract dust and enables to work with larger pieces of vinyls without fearing to get dust on the adhesive.

As the squeegee smoothly slides over the vinyl, the wrinkles and bubbles can be pushed out with ease. The effortless application makes it possible for one wrapper to wrap a vehicle by themselves!

"

"Thanks to FLITE Technology" we can work faster because the film slides so easily over larger shapes. The application time is improved and really more efficient on large surfaces such as heavy trucks. On top of that, we see a superb print quality."

**Féroce Graphics, France** 



### **NEW!**

## DPF V9700 + SERIES V3370

PREMIUM, CAST NON-PVC PRODUCTS





### PERFORMANCE

FLITE Technology provides superior repositionability during installation and a clean removal at the end of the wrap's life.



### **DURABILITY**

Long-lasting high gloss finish, chemical resistance and scratch-recovery properties, where minor scratches will heal over time.



### **SUSTAINABILITY**

Casted from a water-based formulation, these products reduce VOC by 57% during manufacturing and eliminates the release of chloro-chemicals in landfills.



Arlon's Vital Range redefines premium. This range of Non-PVC products are engineered to deliver the essentials to your success while also prioritizing our planet



**A PERFORMANCE EVOLUTION** 





. . . .



**VIBRANT AND RELIABLE PRINT QUALITY IMPROVED CUTTING AND WEEDING** 

**EFFORTLESS LINER RELEASE** 

**HIGH-PERFORMANCE LINER** 

STATIC-FREE ADHESIVE CONSTRUCTION

**ULTRA-REPOSITIONABLE** 

**FAST ADHESIVE BOND** 

**SUPERIOR DIMENSIONAL STABILITY** 

**NO ADHESIVE TO ADHESIVE DELAMINATION** 

REMARKABLE RECOVERY PROPERTIES

**OUTSTANDING HEAT RESISTANCE** 

STAYS IN DEEP CHANNELS

**EXCELLENT BOND TO STAINLESS STEEL** 

**FIRST IN CLASS CLEAN REMOVING** 



- Easy to slide and reposition
- Effortless liner release reduces static and pickup
- Invisible air channels for a super smooth finish
- Perfectly balanced thickness and softness
- Excellent recovery using heat self-healing adhesive
- Clean removal without glue residue on the vehicle










FOR MORE INFO VISIT **PCC.ARLON.COM** 

### Application Tips

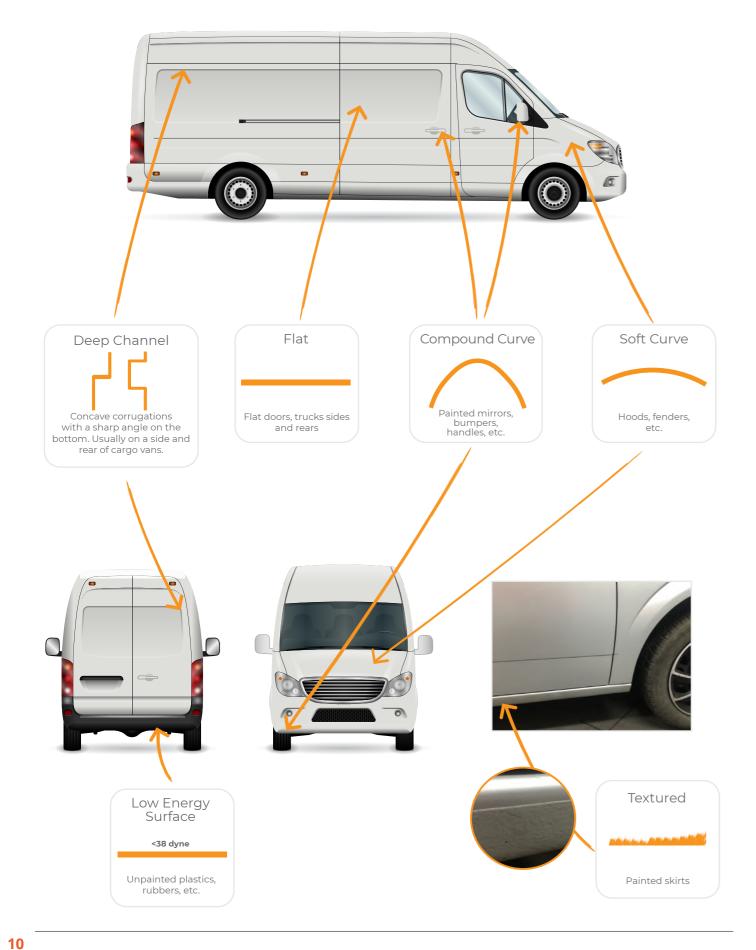

### Vehicle Categories




### Flat truck

Without rivets: Premium Colour Change™	Surfaces	Recommended Products
Flat panels on the sides and/or on the rear.  SLX® Cast Wrap  DPF V9700  DPF 6100XLP  DPF 6000XRP  DPF 6000RP WHITE / CLEA  Fusion Wrap  DPF 4650GLX  DPF 4600GLX  DPF 4550GTX/MTX  DPF 4550G  DPF 4550G  SLX+®  SLX®  SLX®	• Flat panels on the sides and/or on the rear.	SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4650GLX DPF 4600GLX DPF 2400XLP / DPF 2400 DPF 4550GTX/MTX DPF 4550GT/MT



### Car

Surfaces	Recommended Products
No deep channels     Smooth surfaces	Premium Colour Change™ SLX+® SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000XRP DPF 6000RP WHITE/CLEAR Fusion Wrap DPF 4650GLX DPF 4600GLX IllumiNITE Wrap®



### Cargo van

Surfaces	Recommended Products
Deep channels on the sides and/or on the rear	Premium Colour Change™ SLX+® SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE/CLEAR



### Passenger van

Surfaces	Recommended Products
No deep channels     Windows on the sides and/or on the rear	Premium Colour Change™ SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4650 GLX DPF 4600GLX IllumiNITE Wrap™



Surfaces	Recommended Products
No deep channels     Smooth surfaces	Premium Colour Change™ SLX+® SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4650GLX DPF 4600GLX IllumiNITE Wrap™



### **Train & Tram**

Surfaces	Recommended Products
No deep channels     Smooth surfaces	Premium Colour Change™ SLX® Cast Wrap DPF V9700 DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE/CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™

2024 Product Catalogue / arlon.com

For more product info scan the QR-Code:			FILM	1		ļ	ADH	IES	IVE			SI	JRF	ACI	ES		
NAME	DURABILITY UNPRINTED (IN YEARS)	ТУРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	APPLICATIONS
PREMIUM COLOUR CHANGE™ FLITE* TECHNOLOGY	10*	С	76-84	G/M/S	•		•		•	G/C/ W/S	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF V9700 FLITE* TECHNOLOGY	12	PU	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
SLX+® FLITE® TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
SLX® CAST WRAP	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6100XLP  X-Scape°  TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000XRP  X-Scape*  TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000RP WHITE	10	С	50	G	•		•			LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains▶ - Trams
DPF 6000RP CLEAR	7	С	50	G	•					С	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
FUSION WRAP FLITE* TECHNOLOGY	7	Р	60	G	•		•		•	LG	•	•	•		•		Flat trucks Cars Passenger vans Buses Trains - Trams

* Premium Colour Change is rated for an outdoor durability of up to 10 years. For additional details, please see Arlon's	Warranty
▶ Fire certification: Certified for Europe for rail external application in combination with Series 3350 - ▲ Only for flat t	trucks

 $<sup>\</sup>bullet$  5 years durability when used in combination with this lamination

_	_				
	INK		SI	ZE	
SOLVENTS	An An	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
			1.52	25	N/A
•	•	(A)	1.37 1.52	45.72	★Series V3370
•	•	(p)	1.37 1.52	45.72	★Series 3210 Series 3270 Series 3310 Series 3200 Series 3220 Series 3350
•	•	(III)	1.37 1.52	45.72	★ Series 3270 ★ Series 3210 ★ Series 3310 Series 3200 Series 3220 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•	<b>(</b>	1.37 1.52	45.72	Series 3210 Series 3220 Series 3310 Series 3200 Series 3270 Series 3350
•	•	(III)	1.37 1.52	45.72	Series 3210 Series 3220 Series 3310 Series 3350 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420 ▲ •

### WHEN TO USE FUSION WRAP AND WHEN TO USE ARLON CAST FILMS?

### **FUSION WRAP**

is designed for flat surfaces and many complicated shapes, but excluding deep channels. Fusion Wrap requires a relief cut when applied in deep channels.

### **HIGH-PERFORMANCE CAST FILMS**

(Premium Colour Change™, DPF V9700, SLX+®, SLX® Cast Wrap, DPF 6100XLP, DPF 6000XRP, DPF 6000RP) are designed for flat and complicated shapes, including the most demanding channels.

Fusion Wrap	Vehicle Type	ARLON Cast Films
$\checkmark$		$\checkmark$
$\checkmark$		$\checkmark$
Relief Cut Required		$\checkmark$
Relief Cut Required		$\checkmark$
$\checkmark$		$\checkmark$
	P	

TURN THE
PAGE FOR MORE
VEHICLE
FILM PRODUCTS



																		_					
For more product info scan the QR-Code:	Q		FILN	М		<i>J</i>	ADH	IESI	VE			SI	URF	AC	ES	, Si			IN	K	SI	ZE	
NAME	DURABILITY UNPRINTED (IN YEARS)	туре	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	APPLICATIONS	SENSOLOS	3	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
DPF 4650GLX  X-Scape  TECHNOLOGY	7	Р	70	G	•		•		•	LG	•	•	•*				Flat trucks Cars Passenger vans Buses Trains - Trams	•	•	•	1.37 1.52	45.72	★Series 3460 Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
DPF 4600GLX X-Scape* TECHNOLOGY	7	Р	80	G			•		•	LG	•	•	•*				Flat trucks Cars Passenger vans Buses Trains - Trams	•	•		1.37 1.52	45.72	Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series V3370 Series 3310 Series 3420 ▲ Series 3350
ILLUMINITE WRAP™ FLITE* TECHNOLOGY	7	С	125	G	•				•	LG	•	•	•				Cars Passenger vans Buses Trains - Trams	•	•	<b>(</b>	1.22	22.86 45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
DPF 2400XLP X-Scape* TECHNOLOGY	7	С	125	G	•				•	LG	•	•	•				Flat trucks	•	•	<b>(</b>	1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
DPF 2400	7	С	125	G	•					С	•	•					Flat trucks	•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•			•	•	ABS plastics Off-road vehicles Quads Cross-Bikes Machinery decals	•	•	<b>(</b> )	1.02 \( \) 1.24 \( \) 1.37 \( \) 1.52 \( \)	45.72 <b>♦</b> 99.94 <b>♦</b>	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3310 Series 3350
DPF 4550GTX/MTX X-Scape° TECHNOLOGY	5	Р	70	G/M	•				•	LG	•				•	•	Flat trucks	•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
DPF 4550GT/MT	5	Р	70	G/M	•					LG	•				•	•	Flat trucks	•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
DPF <b>4550</b> G	5	Р	70	G	•					С	•				•	•	Flat trucks	•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420

### YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Cast film begins as a liquid called organosol in which Polyvinyl Chloride (PVC) is suspended in a solvent mixture which exists as a liquid at room temperature.

This liquid is run under a knife which determines the thickness of the film and is then cast onto a liner which determines the surface gloss level or texture of the product. Then, the solvents are baked off leaving a solid PVC film behind.

Cast film has never been stressed or stretched, that is why it does not shrink in a way that polymeric/monomeric films do.

### WHAT IS X-SCAPE TECHNOLOGY®?

Arlon's brand name for our air-egress technology which allows air to release through tiny channels in the adhesive-backed vinyl used for fleet, vehicle and general signage applications. X-Scape Technology® allows installers to achieve a speedy installation while maintaining a high enough tack to ensure long-term bond.




- ♣ Only with lamination Series 3170 ▲ Only for flat trucks • 5 years durability when used in combination with this lamination
- Available for special order, please refer to your Arlon Business Development Manager ♦ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length










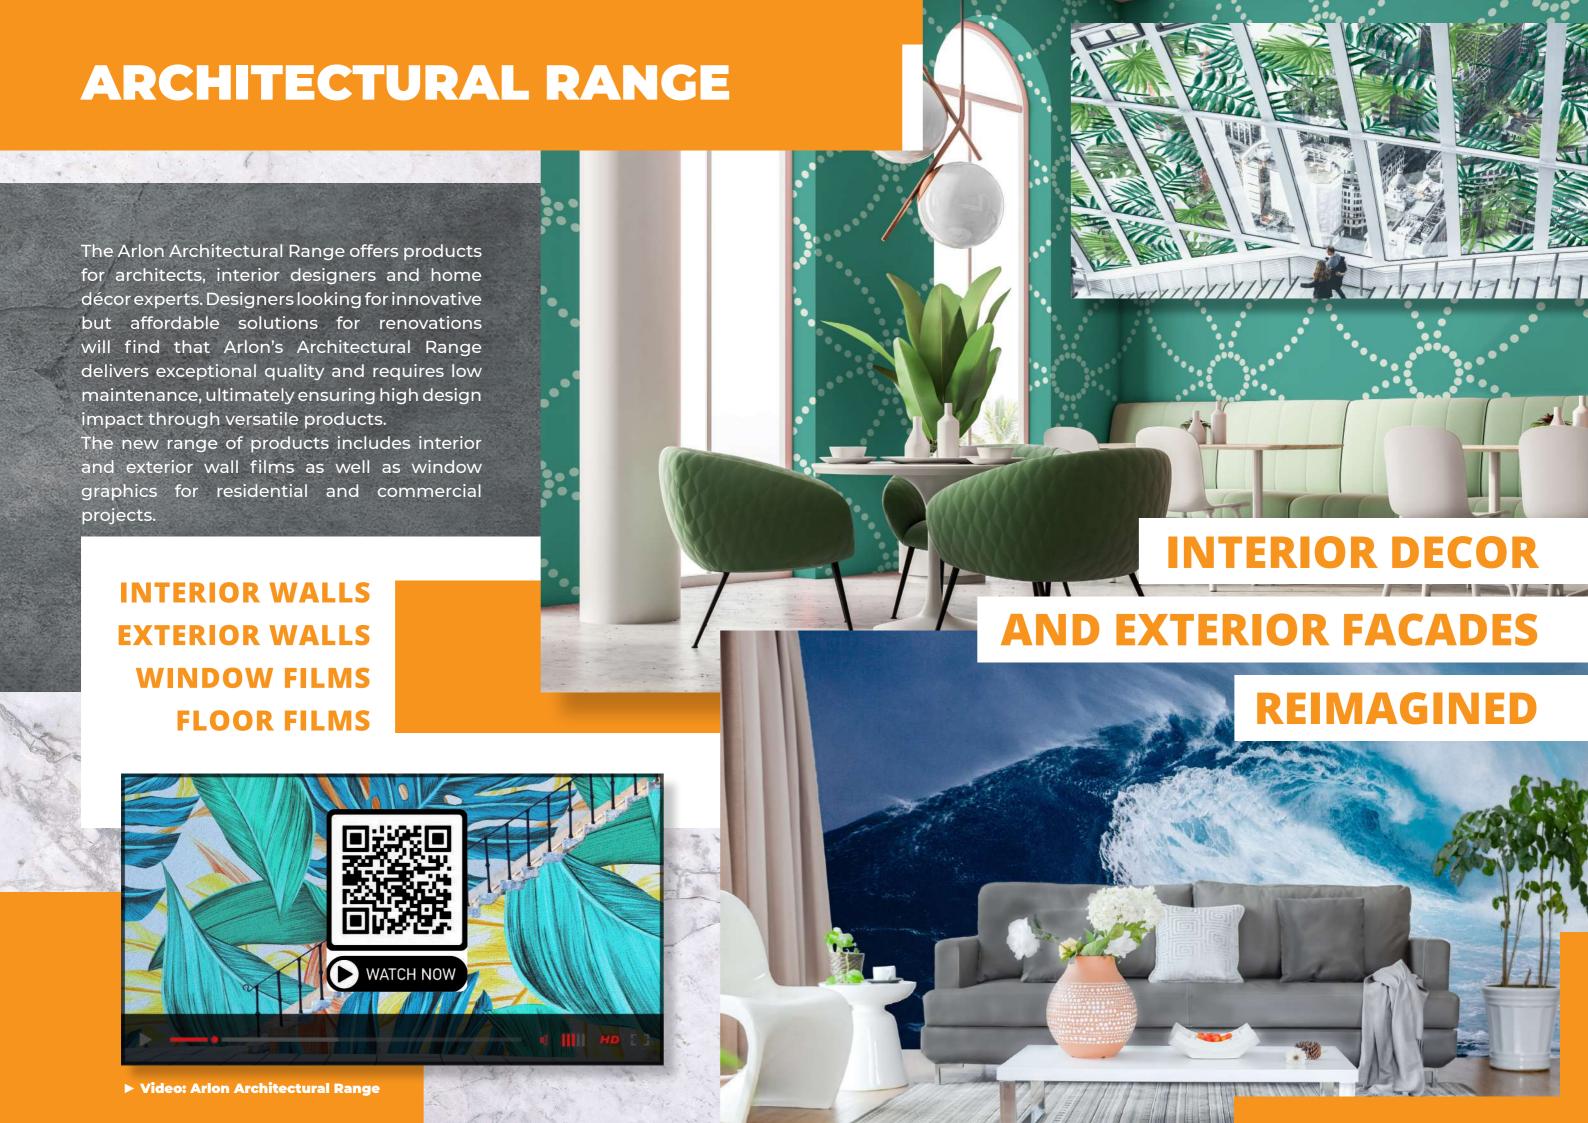

For more product info scan the QR-Code:			FILM			A	ΔDH	ESI	VE		S	URF	ACE	S	
NAME	DURABILITY UNPRINTED (IN YEARS)	ТУРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	APPLICATIONS
DPF 4200 <b>▼</b>	7	Р	150	м/с	•		•			С	•	•	•		Smooth painted/unpainted walls
DPF 4300	4	Р	86	М		•	•			С	•				Smooth painted walls
DPF 510 ULTRA TACK	3	М	100	G/M	•					С	•				Smooth painted/unpainted walls Tile Plastic - Metal

<sup>▼</sup> Please refer to the Interior Walls Installation Guide

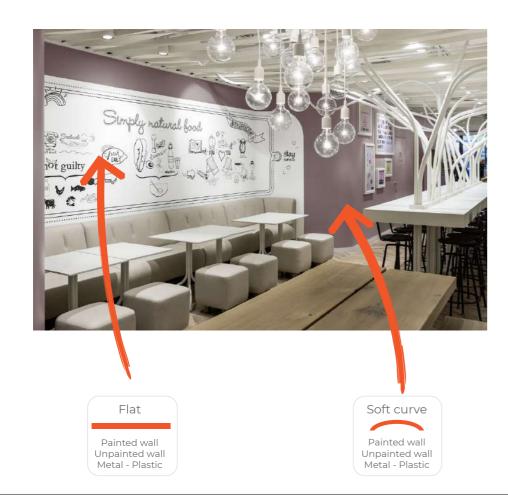


	INK		SIZ	ZE	
SOLVENTS	۸	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(III)	1.37	45.72	N/A
•	•	•	1.37	45.72	★Series 3350 ★Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420

### Plastic



### Tile



Painted/ Unpainted wall



Metal



## FROM TEXTURED TO SMOOTH, TRANSFORM

### YOUR WALLS

## YOU MAY ALSO BE INTERESTED IN THE FOLLOWING:




### Installing Large Interior Wall Graphics

Today, printed interior wall graphics are gradually taking over paint and wallpaper due to their ease of application and removal, customizability and even profitability. In this example, we are installing on a freestanding wall with no ceilings or adjacent walls. This wall is already clean. It is clear of spider webs, removable obstructions and is ready for application. Above all, use the right tools, media, preparation, and application technique. Certainly, this will ensure an efficient, safe, and profitable install. This video will show you how to install large interior wall graphics.

For more videos, visit wrapitright.com

For more product info scan the QR-Code:			FILM			A	ADH	ESI	VE		S	URF	ACE	S	
	DURABILITY UNPRINTED (IN YEARS)		THICKNESS (IN MICRONS)		PERMANENT	REMOVABLE	N REMOVING	GH/ULTRA TACK				SOFT CURVES	RED	LOW ENERGY SURFACES	CATIONS
NAME	DURAE (IN YEA	TYPE	THICK!	FINISH	PERM/	REMO	CLEAN	/нон/	AIR-EGRESS	COLOR	FLAT	SOFT	TEXTURED	LOW EI	АРРЫС
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•	•	•	Brick Concrete - Stucco Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200 HIGH TACK	7	Р	90	S	•			•		С	•	•	•	•	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200X HIGH TACK  X-Scape*  TECHNOLOGY	7	Р	90	S	•			•	•	С	•	•	•	•	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal

<sup>■</sup> Available for special order, please refer to your Arlon Business Development Manager - ▲ Only for flat & smooth surfaces ◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

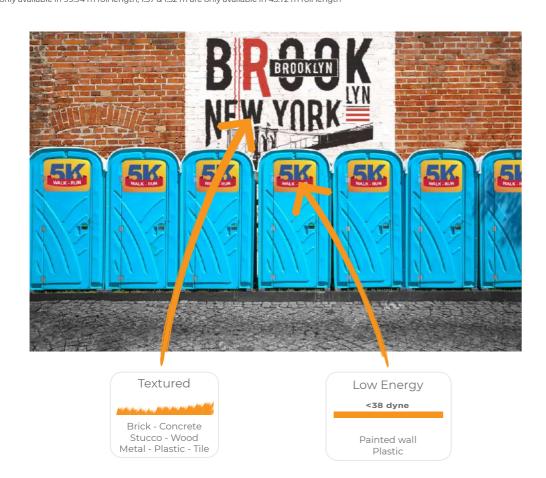


	INK		SI	ZE	
SOLVENTS	3	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(hp	1.02 <b>\rightarrow</b> 1.24 <b>\rightarrow</b> 1.37 <b>\rightarrow</b> 1.52 <b>\rightarrow</b>	99.94 <b>♦</b> 45.72 <b>♦</b>	★Series 3220 ★Series 3420 ▲ Series 3210 Series 3310 Series 3350
•	•	(hp)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ▲ Series 3210 Series V3370 Series 3310 Series 3350
•	•	(p)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ▲ Series 3210 Series V3370 Series 3310 Series 3350

## Brick















### YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



### Installing Large Exterior Wall Graphics

Applying exterior wall graphics presents significantly greater challenges than interior walls. Exterior walls present more options in their construction: materials such as concrete, brick, or stucco; textures which range from smooth to extremely textured; and finishes from primed to painted to bare. Digitally printed exterior wall graphics can achieve amazing results that paint simply cannot. So to maintain and improve the appearance of printed wall graphics, wrap it right the first time, on time, every time. This video will show you how to installing large exterior wall graphics.

For more videos, visit wrapitright.com

For more product info scan the QR-Code:			FILN		Α	ΔH	lES	IVE			SL	JRF	AC	ES			
NAME	DURABILITY UNPRINTED (IN YEARS)	TYPE	THICKNESS (IN MICRONS)	HSINIE	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 4500G CLEAR	5	Р	75	G	•					С	•				•	•	Windows Class Mirrors Partitions
DPF 5450X	5/ 3 <b>▼</b>	Р	80	EG	•				•	С	•				•	•	Windows Class Mirrors Partitions
SERIES 5400	5/ 2 <b>▼</b>	Р	80	М	•					С	•				•	•	Windows Mirrors Partitions
DPF 50WD White	2	Р	90	М		•	•			С	•				•	•	Windows Glass Metal - Aluminium
DPF 50WD CLEAR	2/1	Р	100	G		•	•			С	•				•	•	Windows Glass Metal - Aluminium
DPF 45WF♣	1	М	150	S			•			С	•				•	•	Windows Glass

<sup>▼</sup>Years durability for outdoor applications - ♣ One way vision 60/40 perforated pattern - ♦ Optimal printing on HP Latex 360

### WHAT IS AN

## ETCHED GLASS FILM?

Arlon's Etched Glass vinyl is designed to simulate the look of a fine grain acid etched or a sandblasted glass finish. It eliminates the mess, expense, inconsistency and possible damage to costly glass that these traditional methods can cause.

It may be used on an inner (second surface) or outer layer (first surface) of glass, acrylic or polycarbonate substrates.

The most common use is on second-surface applications, as it helps avoid abrasion and damage due to vandalism.

Arlon's Etched Glass vinyl is also preferred when a uniform, high-gloss surface over the entire sign is required.



	INK		SIZ	ZE	
SOLVENTS	à	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	•	0.76m 1.22m 1.37m 1.52m	45.72	Series 3420 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350
•	•	•	1.22 1.52	50	N/A
N/A	N/A	N/A	1.22 1.52	50	N/A
•	•	•	1.37	45.72	★Series 3420
•	•		1.37	45.72	★Series 3200 Series 3420
•	•	••	1.37 1.52	50	★Series 3200

### TRANSFORM ORDINARY WINDOWS INTO

### PERSONALIZED ART-TAILORED SURFACES

## YOU MAY ALSO BE INTERESTED IN THE FOLLOWING:



### WATCH THE VIDEO ▶

### Wet Application of a Window Graphic

Using a wet application can help make your project picture perfect. This video demonstrates how to correctly install window graphics with a wet application.

For more videos, visit wrapitright.com

2024 Product Catalogue / arlon.com 25

For more product info scan the QR-Code:			FILN			ADI	HES	SIVE			SI	JRF.	ACE	ES			
NAME	DURABILITY UNPRINTED (IN YEARS)	ТУРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 8200 HIGH TACK	7	Р	90	S	•			•		С	•	•	•	•	•		Low-pile carpet Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 8000™ ULTRA TACK	7	Р	90	S	•			•	•=	С	•	•	•	•	•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 4600GLX  X-Scape° TECHNOLOGY	7	Р	80	G	•		•		•	LG	•	•	••				Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510 ULTRA TACK	3	М	100	G/M	•					С	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GT/MT	3	М	100	G/M	•					LG	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GTR/MTR	3	М	100	G/M		•				LG	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo

- Available for special order, please refer to your Arlon Business Development Manager
- $\blacklozenge 1.02 \& 1.24 \text{ m are only available in } 99.94 \text{ m roll length, } 1.37 \& 1.52 \text{ m are only available in } 45.72 \text{ m roll length}$

	INK		SI	ZE	
SOLVENTS	3	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(III)	1.37 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•	(III)	1.02 <b>\circ</b> 1.24 <b>\circ</b> 1.37 <b>\circ</b> 1.52 <b>\circ</b>	99.94 <b>♦</b> 45.72 <b>♦</b>	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•	(III)	1.377 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss Series V3370
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte



### QUALITY IS AT THE CORE OF EVERYTHING WE DO -

### OUR PRODUCTS REFLECT THIS

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:



### How to Install Floor Graphics

Vinyl floor graphics are a great way to direct traffic, show-off your brand, and promote an event. To learn how to install floor graphics follow along with the steps in this video.

For more videos, visit wrapitright.com

DPF 8200 HIGH TACK

IS PERFECT FOR YOUR LOW-PILE CARPETS









For more product info		FILM				A	DH	IES	IVE			SL	JRF	AC	ES		
scan the QR-Code:	DURABILITY UNPRINTED (IN YEARS)	турЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•	•	•	•	•	ABS plastic General signage
DPF 8000™ ULTRA TACK CLEAR	7	Р	75	L	•			•		С	•	•	•	•	•	•	ABS plastic General signage
DPF 8200X HIGH TACK X-Scape°	7	Р	90	S	•			•	•	С	•	•	•	•	•	•	General signage Decals
DPF 8200 HIGH TACK	7	Р	90	S	•			•		Ċ	•	•	•	•	•	•	General signage Decals
DPF 6000XRP X-Scape° TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•		•	•	General signage
DPF 6000RP WHITE	10	С	50	G	•		•			LG	•	•	•		•	•	General signage
DPF 6000RP CLEAR	7	С	50	G	•					С	•	•	•		•	•	Backlit signage General signage
DPF 4650GLX X-Scape° TECHNOLOGY	7	Р	75	G	•				•	С	•	•			•	•	General signage
DPF 4600GLX X-Scape°	7	Р	80	G	•				•	LG	•	•			•	•	General signage
DPF 2400	7	С	125	G	•					С	•	•			•	•	General signage

4	1.02 & 1.24 n	n are only	available i	n 99.94 m i	roll length, 1.3	37 & 1.52	m are only	y available in 45.'	72 m roll length

<sup>■</sup> Available for special order, please refer to your Arlon Business Development Manager

	INK		SI	ZE	
SOLVENTS	۸۸	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(III)	1.02 <b>\rightarrow</b> 1.24 <b>\rightarrow</b> 1.37 <b>\rightarrow</b> 1.52 <b>\rightarrow</b>	99.94 <b>♦</b> 45.72 <b>♦</b>	★ Series 3220 ★ Series 3420 ★ ProTec Series 3960 Series 3210 Series 3310 Series 3350
•	•	•	1.24 <b>♣</b> 1.37 <b>♣</b>	99.94 <b>♣</b> 45.72 <b>♣</b>	★Series 3200
•	•	(III)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3370 Series 3350
•	•	(III)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3370 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•	(hp)	1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 ★Series 3350 Series 3200 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•	•	1.37 1.52	45.72 50	★Series 3460 Series V3370
•	•	<b>(</b>	1.37 1.52	45.72	Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420 ▲ Series 3350
•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310

## YOU MAY ALSO BE INTERESTED IN THE FOLLOWING:



### Flat Substrate Application

At some point in time, you are going to run into a situation where you are going to have to lay out a large graphic by hand onto a flat substrate. When using the proper tools and air egress vinyl, it is going to make your life so much easier. The flat substrate used in this demonstration is a big aluminium panel - one of the most aggressive surfaces on which to lay a graphic. Before beginning the application, make sure your graphic is the proper size for your substrate, including a little extra on all edges for trimming. This video shows how you can use airegress vinyl to make these application projects simple and consistent.

For more videos, visit wrapitright.com

TURN THE
PAGE FOR MORE
COMMERCIAL
FILM
PRODUCTS



<sup>♣ 1.24</sup> m is only available in 99.94 m roll length, 1.37 m is only available in 45.72 m roll length

<sup>▲</sup> Only for flat & smooth surfaces • 5 years durability when used in combination with this lamination

For more product info			FILM				ADHESIVE						JRF	AC	ES		
scan the QR-Code:	DURABILITY UNPRINTED (IN YEARS)	TYPE	THICKNESS (IN MICRONS)	HSINIE	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 4550GTX/MTX X-Scape° **ECHNOLOGY	5	Р	70	G/M	•				•	LG	•				•	•	General signage
DPF 4550GT/MT	5	Р	70	G/M	•					LG	•				•	•	General signage
DPF 4550G	5	Р	70	G	•					С	•				•	•	General signage
DPF 4500G CLEAR	5	Р	75	G	•					С	•				•	•	General signage
DPF 5450X	5/3▼	Р	80	EG	•				•	С	•				•	•	Display window
DPF 4300	4	Р	86	М		•	•			С	•				•	•	General signage Medium-term signage Decals
DPF 510 ULTRA TACK	3	М	100	G/M	•			•		C LG	•				•	•	Short-term signage POP display Kiosk
DPF 510G/M	3	М	100	G/M	•					С	•				•	•	Medium-term signage POP display Kiosk Real estate signage
DPF 510GT/MT	3	М	100	G/M	•					LG	•				•	•	Medium-term signage POP display Kiosk Real estate signage
DPF 510GTR/MTR	3	М	100	G/M		•				LG	•				•	•	Short-term signage POP display Kiosk

PF 4550GT/MT	5	Р	70	G/M	•					LG	•		•	•	General signage
PF 4550G	5	Р	70	G	•					С	•		•	•	General signage
PF 4500G CLEAR	5	Р	75	G	•					С	•		•	•	General signage
DPF 5450X	5/3▼	P	80	EG	•				•	С	•		•	•	Display window
PF 4300	4	Р	86	М		•	•			С	•		•	•	General signage Medium-term signage Decals
PF 510 ULTRA TACK	3	М	100	G/M	•			•		C LG	•		•	•	Short-term signage POP display Kiosk
PF 510G/M	3	М	100	G/M	•					С	•		•	•	Medium-term signage POP display Kiosk Real estate signage
PPF 510GT/MT	3	М	100	G/M	•					LG	•		•	•	Medium-term signage POP display Kiosk Real estate signage
PF 510GTR/MTR	3	М	100	G/M		•				LG	•		•	•	Short-term signage POP display Kiosk
ears durability for outdoor application	ations														

	INK		SI	ZE	
SOLVENTS	۸۸	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3350 Series 3350 Series 3420
•	•	•	0.76m 1.22m 1.37m 1.52m	45.72	Series 3420 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350
•	•	•	1.22 1.52	50	N/A
•	•	•	1.37	45.72	Series 3350 Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420



Polymeric and monomeric films are perfect for short-term and medium-term graphics including temporary signage, indoor graphics and billboards.









### Choose your Overlaminate

For more product info		FILM				SI	ZE	RECOMMENDED VINYL									
scan the QR-Code:	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	RELEASE LINER	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	e+X1S	SLX* CAST WRAP	DPF V9700	DPF 6100XLP	DPF 6000XRP	DPF 6000RP WHITE	DPF 6000RP CLEAR	FUSION WRAP	DPF 4650GLX	
SERIES 3170	7	С	35	G	Clay Coated	1.37 1.52	45.72								*		
SERIES 3200	7	С	50	G	Clear Synthetic	1.37 1.52	45.72	•	•		•	•	•	*	•		
SERIES 3210	7	С	35	G	Clay Coated	1.22 1.37 1.52	45.72	*	*		*	*	*	•	•		
SERIES 3220	7	С	50	G/M	Clay Coated	1.22 <b>▼</b> 1.37 1.52	45.72	•	•		*	*	*	•	•		
SERIES 3270	7	С	50	G/M	Clay Coated	1.37 1.52	45.72	•	*		•	•	•	•	•		
SERIES V3370	12	PU	38	G	Clay Coated	1.37 1.52	45.72	•		*							
SERIES 3310	10	PU	38	G	Clay Coated	1.37 1.52	45.72	•	*		*	*	*	•	•		
SERIES 3420	5	Р	75	G/M/S	Clay Coated	1.07 <b>▼</b> 1.37 1.52	45.72								••		
SERIES 3450	5	Р	80	G/M	Clay Coated	1.07 <b>▼</b> 1.37 1.52	50										
SERIES 3460	7	Р	55	G/M	Clay Coated	1.37 1.52	45.72 50									*	
SERIES 3510	3	М	80	G/M	Polycoated Kraft	1.37 1.52	45.72										
SERIES 3350 ANTI-GRAFFITI►	10	PVDF	50	S	Lay-Flat Polycoated	1.37	45.72		•		•	•	*		•		
PROTEC SERIES 3960	2	М	305	G	Clear Synthetic	1.37	22.86										

DPF 4600GLX	ILLUMINITE WRAP™	DPF 2400XLP	DPF 2400	DPF 8000 ULTRA TACK WHITE	DPF 4550GTX/MTX	DPF 4550GT/MT	DPF 4550G CLEAR	DPF 4300	DPF 510 ULTRA TACK	DPF 8200 HIGH TACK	DPF 8200X HIGH TACK	DPF 50WD WHITE	DPF 50WD CLEAR	DPF 45WF	DPF 510G/M	DPF 8000 ULTRA TACK CLEAR	DPF 510GTR/MTR	DPF 510GT/MT
*					•	•	•	•	•						•		•	•
•	*	*	*		•	•	•						*	*		*		
•	*	*	*	•	•	•	•	•		•	•							
•	*	*	*	*	•	•	•	•		*	*							
•	•	•	•															
•										•	•							
•	•	•	•	•	•	•	•	•		•	•							
• 🛦				*	•	•	*	*	•	*	*	*	•		•		•	•
					*	*												
									*						*		*	*
•				•	•	•	•	*		•	•							
				*						*	*							

- : Recommended overlaminate: Recommended to use for primary application
  : Compatible overlaminate: Can be used as a secondary or alternative application
- ▼Only available in Gloss Finish Environmentally Friendly \* Recommended for fleet and vehicle applications
- ▲ Only for flat surfaces • 5 years durability when used in combination with this lamination
- ▶ Compatible with all Arlon vinyl films used only for flat & smooth surfaces applications

ARLON OVERLAMINATES ARE DESIGNED TO

**PROTECT & PROLONG THE LIFE OF YOUR GRAPHICS** 



The overlaminate must be the same or higher quality than the digital film. If you choose a cast vinyl, choose a cast lamination. Your work will be protected in the best way.

**OUR OVERLAMINATES HAVE THE FEATURES** YOU ARE LOOKING FOR:



Ease of Application





UV Stability



Temperature & Chemical



Abrasion Resistance







POWERED BY ARLON

YOUR ROAD TO SUCCESSFUL APPLICATIONS

Road to Wrap, created by the Arlon Europe Technical Team, is an inspirational series giving authentic behind-the-scenes insights and discuss trending industry topics.

The videos feature tutorials given by best-in-class installers with many years of experience in the wrapping industry. Exclusive motivational content like personal stories, training and unrevealed experiences are now shared with you.



### EUROPE - MIDDLE EAST - AFRICA

- a Dr. Lelykade 22B, 2583CM Den Haag, The Netherlands
- P +31 70 354 4311
- f +31 70 355 7721

### **USA**

- a 200 Boysenberry Lane, Placentia, CA 92870
- P 800 232 7161/+1 714 985 6300
- f +1 714 985 6305

### **CHINA**

- a No. 1989 Xinchang Road, Weifang, Shandong, 262400
- P +86 0536 6226568







Arlon Graphics