











Your Partner of Choice

Arlon, established in 1958 near Los Angeles, California, is a leading global manufacturer of pressure-sensitive adhesive vinyls for the sign and graphics industry.

As one of the world's most experienced casting companies, Arlon has gained a worldwide reputation for quality and innovation.



WRAPITRIGHT.COM

WrapItRight.com gives you access to expert advice and tutorials from industry leaders and specialists!

- ▶ How-to video library featuring vehicle wraps, commercial signage, and digital printing techniques.
- ▶ Create custom playlists and watch videos later.
- ▶ Get updates on Trade Shows and Training Events.

Throughout this brochure you will see companion how-to videos featuring recommended methods and techniques. Videos can be accessed by using the QR code or visiting wrapitright.com.



EUROPE CUSTOMER SERVICE:

- ArlonEuropeCS@arlon.com
- P Head Office: +31 70 354 4311

Arlon is proudly ISO 9001:2015 certified.





Table of Contents

At-d-Glance Products Chart	- 4
Benefits of FLITE Technology®	6
Vehicle Graphics	8
Architectural Range	16
•Interior Wall Graphics	18
•Exterior Wall Graphics	20
•Window Graphics	22
•Floor Graphics	24
Commercial Graphics	28
Overlaminates	34
Banners	36

	CAT	rEGO	DRY	,		۵		FILM			Α	DHE	ESIV	/E				SL	JRF	ACI	ES				INK	
VEHICLE GRAPHICS	INTERIOR WALL GRAPHICS	EXTERIOR WALL GRAPHICS	WINDOW GRAPHICS	COMMERCIAL GRAPHICS	NAME	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	CORVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	SOLVENTS	UV	LATEX
•					SLX®+ FLITE*	10	С	50	G	•		•		•	LG	•	•	•	•	•		•	•	•	•	(
•					SLX™ CAST WRAP FLITE	10	С	50	G	•		•		•	LG	•	•	•	•	•		•	•	•	•	(
•					DPF 6100XLP X-Scape°	10	С	50	G	•		•		•	LG	•	•	•	•	•		•	•	•	•	(
•				•	DPF 6000XRP X-Scape°	10	С	50	G	•		•		•	LG	•	•	•	•	•		•	•	•	•	(
•				•	DPF 6000RP WHITE	10	С	50	G	•		•			LG	•	•	•	•	•		•	•	•	•	(
•				•	DPF 6000RP CLEAR	7	С	50	G	•					С	•	•	•	•	•		•	•	•	•	•
•					FUSION WRAP	7	Р	60	G	•		•		•	LG	•	•	•		•		•	•	•	•	(
•				•	DPF 4600GLX X-Scape*	7	Р	80	G	•		••		•	LG	•	•	•*				•	•	•	•	(
•					ILLUMINITE WRAPTM FLITE	7	С	125	G	•				•	LG	•	•	•				•	•	•	•	(
•					DPF 2400XLP X-Scape°	7	С	125	G	•				•	LG	•	•	•				•	•	•	•	(
•				•	DPF 2400	7	С	125	G	•					С	•	•					•	•	•		
•		•		•	DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•			•	•	•	•	•	•	(
•				•	DPF 4550 GTX/MTX X-Scape° TECHNOLOGY	5	Р	70	G/M	•				•	LG	•						•	•	•	•	•
•				•	DPF 4550GT/MT	5	Р	70	G/M	•					LG	•						•	•	•	•	•
•				•	DPF 4550G	5	Р	70	G	•					С	•						•	•	•	•	•
	•				DPF 4200	7	P	150	M/C	•		•			С	•	•			•		•		•	•	(
	•			•	DPF 4300	4	Р	86	М		•	•			С	•						•	•	•	•	•
	•			•	DPF 510 ULTRA TACK	3	М	100	G/M	•			•		C/ LG	•						•	•	•		•
				•	DPF 8000™ ULTRA TACK CLEAR	7	Р	75	L	•			•		С	•	•			•	•	•	•	•	•	•
		•		•	DPF 8200 HIGH TACK	7	Р	90	S	•			•		С	•	•			•	•	•	•	•	•	(
		•		•	DPF 8200X HIGH TACK **TECHNOLOGY	7	Р	90	S	•			•	•	С	•	•			•	•	•	•	•	•	(
			•		SERIES 5400	5/ 2 ▼	Р	80	М	•					С	•						•	•	N/A	N/A	N/A
			•		DPF 5200	7	С	50	М	•					С	•						•	•	•	•	•
			•		DPF 50WD WHITE/CLEAR	2/ 1 ▼	Р	90 100	G/M		•	•			С	•						•	•	•	•	•
			•		DPF 45WF	1	М	150	S			•			С	•						•	•	•	•	•
				•	DPF 4500 X-Scape TECHNOLOGY	5	Р	75	G/M	•				•	LG	•						•	•	•	•	•
				•	DPF 4500GX X-Scape	5	Р	75	G	•				•	С	•						•	•	•	•	•
				•	DPF 4500GT/MT	5	Р	75	G/M	•					LG	•						•	•	•	•	•
				•	DPF 4500G WHITE/CLEAR	5	Р	75	G	•					С	•						•	•	•	•	• 🛦
				•	DPF 510G/M	3	М	100	G/M	•					С	•						•	•	•		•
				•	DPF 510GTR/MTR	3	М	100	G/M		•				LG	•						•	•	•		•
				•	DPF 510GT/MT	3	М	100	G/M	•					LG	•						•	•	•		•

CATE	GORY	٥		FILM			ļ	ADHE	ESIVI	E				Sl	JRF	AC	ES			INK			
OVERLAMINATES	BANNERS	NAME	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	CORVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	SOLVENTS	UV	LATEX
•		SERIES 3170	7	С	35	G	•					С	•	•	•		•		•	•	N/A	N/A	N/A
•		SERIES 3200	7	С	50	G	•					С	•	•	•	•	•		•	•	N/A	N/A	N/A
•		SERIES 3210	7	С	35	G	•					С	•	•	•	•	•		•	•	N/A	N/A	N/A
•		SERIES 3220	7	С	50	G/M	•					С	•	•	•	•	•		•	•	N/A	N/A	N/A
•		SERIES 3270	7	С	50	G/M	•					С	•	•	•	•	•		•	•	N/A	N/A	N/A
•		SERIES 3310 ₺	10	PU	38	G	•					С	•	•	•	•	•		•	•	N/A	N/A	N/A
•		SERIES 3420	5	Р	75	G/M S	•					С	•						•	•	N/A	N/A	N/A
•		SERIES 3450	5	Р	80	G/M	•					С	•						•	•	N/A	N/A	N/A
•		SERIES 3510	3	М	80	G/M	•					С	•						•	•	N/A	N/A	N/A
•		SERIES 3350	10	PVDF	50	S	•					С	•						•	•	N/A	N/A	N/A
•		PROTEC SERIES 3960	2	М	305	G	•					С	•	•					•	•	N/A	N/A	N/A
	•	DPF 208 №	1	PP	200	S	N/A	N/A	N/A	N/A	N/A	N/A	•						•		•		
	•	DPF 210	1	PL	250	S/P	N/A	N/A	N/A	N/A	N/A	N/A	•						•		•		
	•	DPF 215	1	PL	370	S	N/A	N/A	N/A	N/A	N/A	N/A	•						•		•		

ARLON DICTIONARY:

Permanent Adhesives: Designed for short, medium and long-term applications. May need heat and/or chemicals to be removed.

Removable Adhesives: Designed for short-term applications. Can be removed without heat or chemicals, with little or no adhesive left behind.

Clean Removing Adhesives: An added feature of some permanent adhesives. Up to 30% of adhesive may stay behind during film removal.

Air-Egress: Air channels in the adhesive that allows air to release when bubbles are formed. Helps for an easier installation. The adhesive used could be permanent or removable.

CHART CAPTION:

▼Years durability for outdoor applications

C: Cast P: Polymeric M: Monomeric PU: Polyurethane PVDF: Polyvinylidene fluoride (PVC free) PP: Polypropylene PL: Polyester

G: Gloss finish M: Matte finish S: Satin finish L: Luster EG: Etched glass finish P: Pebble finish C: Canvas

CLEAN REMOVING:

***:** Clean removing is only for vehicle applications

: Available for special order, please refer to your Arlon Business Development Manager LG: Light Grey Adhesive C: Clear Adhesive

♣: Only with overlaminate Series 3170

Solvent: Printable with solvent and eco-solvent inks Latex: The logo means the film is certified for HP Latex Inks

▲: Not compatible with DPF 4500 Clear

OVERLAMINATES (In The Brochure): Recommended overlaminate

PVC FREE:• Environmentally Friendly

FLITE TECHNOLOGY®?



FLITE Technology® is a lite contact, repositionable system based on a unique adhesive and liner combination. An installer will experience the easiest to apply products in the market.



25% FASTER

FLITE Technology® wrap films allow you to get a vehicle wrapped up to 25% faster compared to other films. Applications on flat surfaces can be done even up to 40-50% faster!

A REAL MONEY-SAVER

Finishing applications faster means more vehicles wrapped in the same time. FLITE Technology® saves a a lot of time per vehicle: reduced labor costs will enable your business to thrive.



FLITE Technology® wrap films offer:

- ► Superior Repositionability
- ▶ Vibrant & Reliable Print Quality
- ► Long Term Bond
- ▶ High Durability
- ► Easy & Clean Removability

IMPRESS YOUR CUSTOMERS

With FLITE Technology® wrap films you save time and money, which allows you to lower the costs and offer more competitive pricing to your customers. Your customers will love the precise, vibrant graphics and when it comes to removing the film again you will love the easy and clean removability. The wrapping process will have increased efficiency and amongst other reduce the downtime of fleet which your clients will highly value!

MAXIMUM PRECISION

No more frustration when the graphics need to be repositioned on the vehicle! Applied areas of FLITE Technology® wrap films can be lifted again and again for repositioning until the graphics are precisely in the right place! Once the graphics are in the right place they will stay put, even in deep channels and complex curves.

IT TAKES ONLY ONE

The effortless removal of the liner of FLITE Technology® films reveals the light grey opaque adhesive. The adhesive is non-static, thus does not attract dust and enables to work with larger pieces of vinyls without fearing to get dust on the adhesive. As the squeegee smoothly slides over the vinyl, the wrinkles and bubbles can be pushed out with ease. The ease of application makes it possible for one wrapper to wrap a vehicle!

"Thanks to FLITE Technology® we can work faster because the film slides so easily over larger shapes. The application time is improved and really more efficient on large surfaces such as heavy trucks. On top of that, we see a superb print quality."

Féroce Graphics, France



A PERFORMANCE EVOLUTION






VIBRANT AND RELIABLE PRINT QUALITY IMPROVED CUTTING AND WEEDING EFFORTLESS LINER RELEASE HIGH-PERFORMANCE LINER STATIC-FREE ADHESIVE CONSTRUCTION **ULTRA-REPOSITIONABLE FAST ADHESIVE BOND**

SUPERIOR DIMENSIONAL STABILITY **NO ADHESIVE TO ADHESIVE DELAMINATION** REMARKABLE RECOVERY PROPERTIES **OUTSTANDING HEAT RESISTANCE** STAYS IN DEEP CHANNELS **EXCELLENT BOND TO STAINLESS STEEL** FIRST IN CLASS CLEAN REMOVING



arlon.com

Application Tips

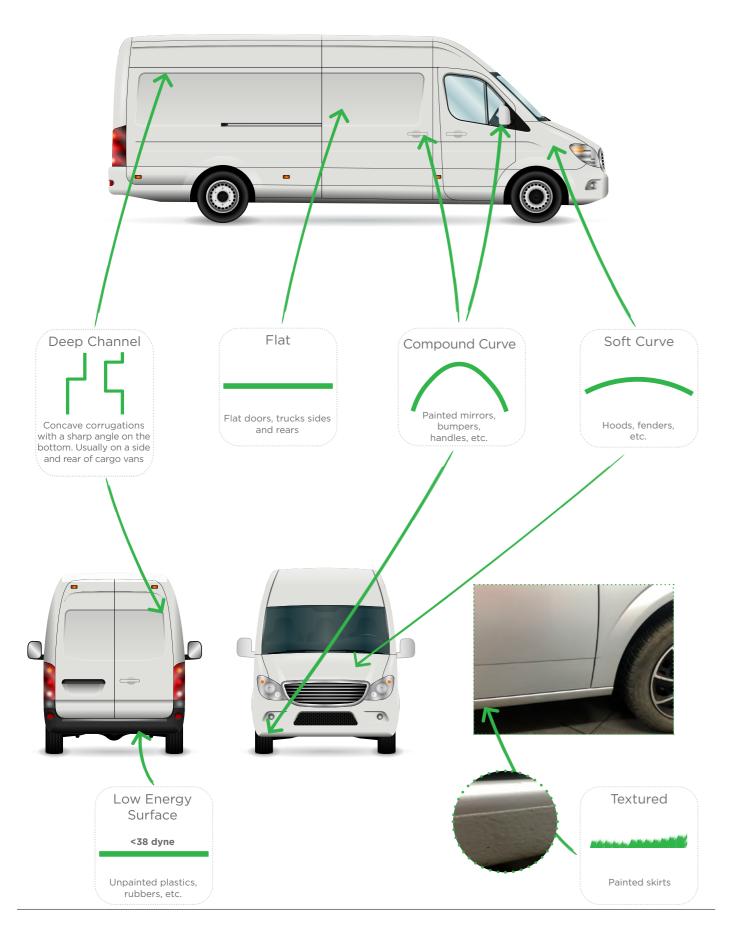

Vehicle Categories



Flat truck

Surfaces	Recommended Products
Without rivets: • Flat panels on the sides and/or on the rear. • Smooth surfaces	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX DPF 2400XLP / DPF 2400 DPF 4550GTX/MTX DPF 4550G DPF 4550G



Surfaces	Recommended Products
No deep channels Smooth surfaces	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Cargo van

Surfaces	Recommended Products
• Deep channels on the sides and/or on the rear	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR



Passenger van

Surfaces	Recommended Products
 No deep channels Windows on the sides and/ or on the rear 	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Surfaces	Recommended Products
No deep channels Smooth surfaces	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™



Train & Tram

Surfaces	Recommended Products
No deep channels Smooth surfaces	SLX®+ SLX™ Cast Wrap DPF 6100XLP DPF 6000XRP DPF 6000RP WHITE / CLEAR Fusion Wrap DPF 4600GLX IllumiNITE Wrap™

For More Products			-	-													
Information Scan the QR-Code			FILI	4		,	ADH	ESI	VE			SI	JRF.	ACE	S		
□ 第 □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	APPLICATIONS
SLX®+ FLITE® TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
SLX™ CAST WRAP FLITE TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6100XLP X-Scape* TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000XRP X-Scape* TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
DPF 6000RP WHITE	10	С	50	G	•		•			LG	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains▶ - Trams
DPF 6000RP CLEAR	7	С	50	G	•					С	•	•	•	•	•		Flat trucks Cars Cargo vans Passenger vans Buses Trains - Trams
FUSION WRAP	7	Р	60	G	•		•		•	LG	•	•	•		•		Flat trucks Cars Passenger vans Buses Trains - Trams

$\blacktriangleright \ \text{Fire certification: Certified for Europe for rail external application in combination with Series 3350} \ \text{-} \ \blacktriangle \ \text{Only for flat trucks}$	
---	--

^{• 5} years durability when used in combination with this lamination

	INK		SI	ZE	
SOLVENTS	۸n	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•		1.37 1.52	45.72	★Series 3210 Series 3270 Series 3310 Series 3200 Series 3220 Series 3350
•	•	(p)	1.37 1.52	45.72	★Series 3270 ★Series 3210 ★Series 3310 Series 3200 Series 3220 Series 3350
•	•	(p)	1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•	(III)	1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 Series 3200 Series 3270 Series 3350
•	•	(p)	1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 ★Series 3350 Series 3200 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420 ♣ Series 3350

WHEN TO USE FUSION WRAP AND WHEN TO USE ARLON CAST FILMS?

Fusion Wrap
is designed for flat surfaces and many complicated shapes, but excluding deep channels. Fusion Wrap requires a relief cut when applied in deep channels.

High-Performance Cast films
(SLX®+, SLX™ Cast Wrap, DPF 6100XLP,
DPF 6000XRP, DPF 6000RP) are designed for
flat and complicated shapes, including the most
demanding channels.

Fusion Wrap	Vehicle Type	ARLON Cast Films
\checkmark		\checkmark
\checkmark	~	\checkmark
Relief Cut Required		\checkmark
Relief Cut Required		\checkmark
\checkmark		\checkmark
\checkmark	P.	\checkmark

TURN THE PAGE FOR MORE

GRAPHICS PRODUCTS



For More Products Information Scan the QR-Code	FILM				,	ADH	ESI	VE			SI	JRF	ACE	ES			
□ # □ □ NAME	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	COMPOUND CURVES	DEEP CHANNELS	TEXTURED	LOW ENERGY SURFACES	APPLICATIONS
DPF 4600GLX X-Scape° TECHNOLOGY	7	Р	80	G	•		•		•	LG	•	•	• ¥				Flat trucks Cars Passenger vans Buses Trains - Trams
ILLUMINITE WRAPTM FLITE TECHNOLOGY	7	С	125	G	•				•	LG	•	•	•				Cars Passenger vans Buses Trains - Trams
DPF 2400XLP X-Scape° TECHNOLOGY	7	С	125	G	•				•	LG	•	•	•				Flat trucks
DPF 2400	7	С	125	G	•					С	•	•					Flat trucks
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•			•	•	ABS plastics Off-road vehicles Quads Cross-Bikes Machinery decals
DPF 4550GTX/MTX X-Scape* TECHNOLOGY	5	Р	70	G/M	•				•	LG	•				•	•	Flat trucks
DPF 4550GT/MT	5	Р	70	G/M	•					LG	•				•	•	Flat trucks
DPF 4550G	5	Р	70	G	•					С	•				•	•	Flat trucks

♣ Only with lamination Series 3170 - ▲ Only for flat trucks - • 5 years durability when used in combination with this lamination
--

12

	INK		SI	ZE	
SOLVENTS	۸n	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•		1.37 1.52	45.72	★Series 3170 Series 3200 Series 3210 Series 3220 Series 3370 Series 3310 Series 3420 ♣ •
•	•	(hp)	1.22	22.86 45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•	•	(1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•	•	(p)	1.02 \rightarrow 1.24 \rightarrow 1.37 \rightarrow 1.52 \rightarrow	45.72 ♦ 99.94 ♦	★Series 3220 ★Series 3420 ★ProTec Series 3960 Series 3210 Series 3350
•	•	•	1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.07 1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350

YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Cast film begins as a liquid called organosol in which Polyvinyl Chloride (PVC) is suspended in a solvent mixture which exists as a liquid at room temperature.

This liquid is run under a knife which determines the thickness of the film and is then cast onto a liner which determines the surface gloss level or texture of the product. Then, the solvents are baked off leaving a solid

PVC film behind. Cast film has never been stressed or stretched, that is why it does not shrink in a way that

polymeric/monomeric films do.

WHAT IS

X-SCAPE **TECHNOLOGY®?**

Arlon's brand name for our air-egress technology which allows air to release through tiny channels in the adhesive-backed vinyl used for fleet, vehicle and general signage applications. X-Scape Technology® allows installers to achieve a speedy installation while maintaining a high enough tack to ensure long-term bond.



[■] Available for special order, please refer to your Arlon Business Development Manager - • 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

IMAGE GALLERY

































WHY USE OUR

ARCHITECTURAL RANGE?

The Arlon Architectural Range offers products for architects, interior designers and home décor experts.

Designers looking for innovative but affordable solutions for renovations will find that Arlon's Architectural Range delivers exceptional quality and requires low maintenance, ultimately ensuring high design impact through versatile products.

The new range of products includes interior and exterior wall films as well as window graphics for residential and commercial projects. Discover our films by category on the following pages:

INTERIOR WALLS

EXTERIOR WALLS

WINDOW GRAPHICS

FLOOR GRAPHICS



ARCHITECTURAL RANGE



ARCHITECTURE REIMAGINED



Discover our self-adhesive films for applications on interior and exterior walls, floors, rough and smooth surfaces, windows and glass.

For More Products Information Scan the QR-Code			FILM			Á	ADH	ESI	VE		S	URF	ACE	S	
	DURABILITY UNPRINTED (IN YEARS)		ESS RONS)		NENT	ABLE	REMOVING	LTRA TACK	RESS			URVES	ZED .	LOW ENERGY SURFACES	APPLICATIONS
NAME	DURABI (IN YEA	TYPE	THICKNESS (IN MICRONS)	FINISH	PERMAI	REMOV,	CLEAN	п/нон	AIR-EGI	COLOR	FLAT	SOFT CURV	TEXTURED	LOW EN	APPLIC
DPF 4200 ▼	7	Р	150	M/C	•		•			С	•	•	•		Smooth painted/unpainted walls
DPF 4300	4	Р	86	М		•	•			С	•				Smooth painted walls
DPF 510 ULTRA TACK	3	М	100	G/M	•					С	•				Smooth painted/unpainted walls Tile Plastic - Metal

[▼] Please refer to the Interior Walls Installation Guide



	INK		SIZ	ZE	
SOLVENTS	۸۸	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(III)	1.37	45.72	N/A
•	•	•	1.37	45.72	Series 3350 Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420





Tile



Plastic



Metal



FROM TEXTURED TO SMOOTH.

TRANSFORM YOUR WALLS

YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Installing Large Interior Wall Graphics

Today, printed interior wall graphics are gradually taking over paint and wallpaper due to their ease of application and removal, customizability and even profitability. In this example, we are installing on a free-standing wall with no ceilings or adjacent walls. This wall is already clean. It is clear of spider webs, removable obstructions and is ready for application. Above all, use the right tools, media, preparation, and application technique. Certainly, this will ensure an efficient, safe, and profitable install.

This video will show you how to install large interior wall graphics.


For more videos, visit wrapitright.com

EXTERIOR WALL GRAPHICS

Choose your Vinyl

For More Products Information Scan the QR-Code			FILM			ļ	ADH	ESI	VE		S	URF	ACE	S	
	DURABILITY UNPRINTED (IN YEARS)		THICKNESS (IN MICRONS)	Ŧ	PERMANENT	REMOVABLE	N REMOVING	/ULTRA TACK				CURVES	TEXTURED	LOW ENERGY SURFACES	PPLICATIONS
NAME	DURA (IN YE	TYPE	THICK (IN MI	FINISH	PERM	REMO	CLEA	нісн/	AIR-E	COLOR	FLAT	SOFT	ТЕХТ	LOW E	APPLI
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•	•	•	Brick Concrete - Stucco Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200 HIGH TACK	7	Р	90	S	•			•		С	•	•	•	•	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal
DPF 8200X HIGH TACK X-Scape° TECHNOLOGY	7	Р	90	S	•			•	•	С	•	•	•	•	Brick - Concrete Tile Wood Smooth painted/unpainted walls Plastic - Metal

■ Available for special order, please refer to your Arlon Business Development Manager - ▲ Only for flat & smooth surfaces ◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

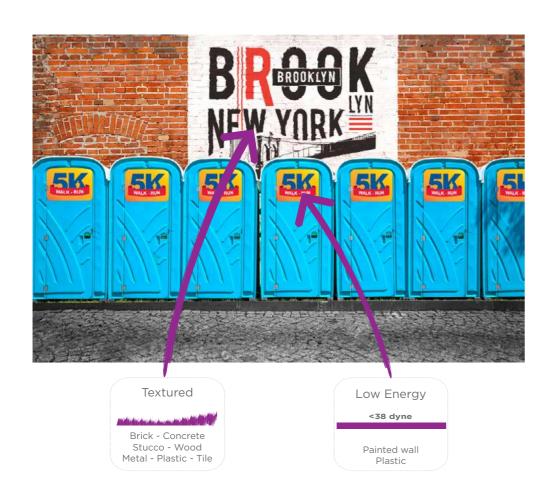

	INK		SI	ZE	
SOLVENTS	۸۵	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(hp)	1.02 \(\) 1.24 \(\) 1.37 \(\) 1.52 \(\)	99.94 ♦ 45.72 ♦	★Series 3220 ★Series 3420 ▲ Series 3210 Series 3310 Series 3350
•	•	(III)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ▲ Series 3210 Series 3310 Series 3350
•	•	(hp)	1.37 1.52	45.72	★Series 3220 ★Series 3420 ▲ Series 3210 Series 3310 Series 3350

Brick Plastic Concrete Tile Painted/ Unpainted wall Stucco Wood Metal

FROM TEXTURED TO SMOOTH, **TRANSFORM YOUR WALLS**

YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Applying exterior wall graphics presents significantly greater challenges than interior walls. Exterior walls present more options in their construction: materials such as concrete, brick, or stucco; textures which range from smooth to extremely textured; and finishes from primed to painted to bare. Digitally printed exterior wall graphics can achieve amazing results that paint simply cannot. So to maintain and improve the appearance of printed wall graphics, wrap it right the first time, on time, every time. This video will show you how to installing large exterior wall graphics.

For more videos, visit wrapitright.com


For More Products Information Scan the QR-Code			FILN	4		A	DH	IES	IVE			SU	IRF	AC	ES		
	DURABILITY UNPRINTED (IN YEARS)		VESS RONS)		NENT	ABLE	REMOVING					CURVES	rured	ENERGY SURFACES	OR	OOR	PPLICATIONS
NAME	DURAB (IN YEA	TYPE	THICKNESS (IN MICRONS)	FINISH	PERMA	REMOV	CLEAN				FLAT	SOFT C	TEXTU	LOW ER	INDOO	оптроо	APPLIC
SERIES 5400	5/ 2▼	Р	80	М	•					С	•				•	•	Windows Mirrors Partitions
DPF 5200	7	С	50	М	•					С	•				•	•	Windows Mirrors Partitions
DPF 50WD WHITE	2	Р	90	М		•	•			С	•				•	•	Windows Glass Metal - Aluminium
DPF 50WD CLEAR	2/1	Р	100	G		•	•			С	•				•	•	Windows Glass Metal - Aluminium
DPF 45WF♣	1	М	150	S			•			С	•				•	•	Windows Glass

1	Years durability for	r outdoor	applications	- 🥗	One way	vision 60/40) perforated	pattern	- 🔻	 Optimal printing on H 	P Latex 360

	IINK		314	4-	
SOLVENTS	۸۸	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
N/A	N/A	N/A	1.22 1.52	50	N/A
•	•	•	1.22 1.52	45.72	N/A
•	•	•	1.37	45.72	★Series 3420
•	•		1.37	45.72	★Series 3200 Series 3420
•	•	••	1.37 1.52	50	★Series 3200

TRANSFORM ORDINARY WINDOWS INTO PERSONALIZED ART-TAILORED

YOU MAY ALSO
BE INTERESTED IN THE
FOLLOWING:



Using a wet application can help make your project picture perfect. This video demonstrates how to correctly install window graphics with a wet application.

For more videos, visit wrapitright.com

WHAT IS AN

ETCHED GLASS FILM?

SERIES 5400 DPF 5200

Arlon's Etched Glass vinyl is designed to simulate the look of a fine grain acid etched or a sandblasted glass finish. It eliminates the mess, expense, inconsistency and possible damage to costly glass that these traditional methods can cause.

It may be used on an inner (second surface) or outer layer (first surface) of glass, acrylic or polycarbonate substrates.

The most common use is on second-surface applications, as it helps avoid abrasion and damage due to vandalism.

Arlon's Etched Glass vinyl is also preferred when a uniform, high-gloss surface over the entire sign is required.

2021 Print Media Product Brochure / arlon.com 23

FLOOR GRAPHICS

Choose your Vinyl

For More Products																	
Information Scan the QR-Code			FILI	М		,	ADI	HES	SIVE	1		SI	JRF.	ACE	ES		
D 没见	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK			FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 8200 HIGH TACK	7	Р	90	s	•			•		С	•	•	•	•	•		Low-pile carpet Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 8000™ ULTRA TACK	7	Р	90	S	•			•	••	С	•	•	•	•	•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 4600GLX X-Scape TECHNOLOGY	7	Р	80	G	•		•		•	LG	•	•	•				Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510 ULTRA TACK	3	М	100	G/M	•					С	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GT/MT	3	М	100	G/M	•					LG	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo
DPF 510GTR/MTR	3	М	100	G/M		•				LG	•				•		Smooth floors Sealed concrete Ceramic tile Waxed vinyl flooring Sealed wood Marble Terrazzo

	Available for special order, please refer to your Arlon Business Development Manager		
•	102 & 124 m are only available in 99 94 m roll length 137 & 152 m are only available in	1572 r	m roll land

	INK		SI	ZE	
SOLVENTS	۲۵	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(hp)	1.37 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•		1.02 ♦ 1.24 ♦ 1.37 ♦ 1.52 ♦	99.94 ♦ 45.72 ♦	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•	•	(1.37 1.52	45.72	★Series 3420 Gloss or Matte ★Series 3220 Gloss
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte
•		•	1.07 1.37 1.52	45.72	★Series 3510 Matte

QUALITY IS AT THE CORE OF EVERYTHING WE DO -**OUR PRODUCTS REFLECT THIS**

YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Vinyl floor graphics are a great way to direct traffic, show-off your brand, and promote an event. To learn how to install floor graphics follow along with the steps in this video.

For more videos, visit wrapitright.com



DPF 8200 HIGH TACK

IS PERFECT FOR YOUR LOW-PILE CARPETS



























2021 Print Media Product Brochure / arlon.com 27

	$\overline{}$			-		_		_	<u> </u>								
For More Products Information			FILI	М		А	DH	ES	IVE			SL	JRF	ACI	ES		
Scan the QR-Code	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 8000™ ULTRA TACK WHITE	7	Р	90	S	•			•	•=	С	•	•	•	•	•	•	ABS plastic General signage
DPF 8000™ ULTRA TACK CLEAR	7	Р	75	L	•			•		С	•	•	•	•	•	•	ABS plastic General signage
DPF 8200X HIGH TACK X-Scape TECHNOLOGY	7	Р	90	S	•			•	•	С	•	•	•	•	•	•	General signage Decals
DPF 8200 HIGH TACK	7	Р	90	S	•			•		С	•	•	•	•	•	•	General signage Decals
DPF 6000XRP X-Scape° TECHNOLOGY	10	С	50	G	•		•		•	LG	•	•	•		•	•	General signage
DPF 6000RP WHITE	10	С	50	G	•		•			LG	•	•	•		•	•	General signage
DPF 6000RP CLEAR	7	С	50	G	•					С	•	•	•		•	•	Backlit signage General signage
DPF 4600GLX X-Scape° TECHNOLOGY	7	Р	80	G	•				•	LG	•	•			•	•	General signage
DPF 2400	7	С	125	G	•					С	•	•			•	•	General signage
DPF 4550GTX/MTX X-Scape* TECHNOLOGY	5	Р	70	G/M	•				•	LG	•				•	•	General signage
DPF 4550GT/MT	5	Р	70	G/M	•					LG	•				•	•	General signage
DPF 4550G	5	Р	70	G	•					С	•				•	•	General signage

	INK		SI	ZE	
SOLVENTS	'n	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	(p)	1.02 \rightharpoonup 1.24 \rightharpoonup 1.37 \rightharpoonup 1.52 \rightharpoonup	99.94 ♦ 45.72 ♦	★Series 3220 ★Series 3420 ★ProTec Series 396 Series 3210 Series 3310 Series 3350
•	•	•	1.24♣ 1.37♣	99.94 ♣ 45.72 ♣	★Series 3200
•	•	hp	1.37 1.52	45.72	★Series 3220 ★Series 3420 ★ProTec Series 396 Series 3210 Series 3310 Series 3350
•	•	(III)	1.37 1.52	45.72	Series 3220 Series 3420 ProTec Series 396 Series 3210 Series 3310 Series 3350
•	•	(III)	1.37 1.52	45.72	Series 3210 Series 3220 Series 3310 Series 3200 Series 3270 Series 3350
•	•		1.37 1.52	45.72	★Series 3210 ★Series 3220 ★Series 3310 ★Series 3350 Series 3200 Series 3270
•	•	•	1.37 1.52	45.72	★Series 3200 Series 3210 Series 3220 Series 3270 Series 3310
•	•	(hp)	1.37 1.52	45.72	Series 3170 Series 3200 Series 3210 Series 3220 Series 3270 Series 3310 Series 3420 Series 3350
•			1.22	45.72	★Series 3200 ★Series 3210 ★Series 3220 Series 3270 Series 3310
•	•	•	1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420
•	•	•	1.37 1.52	50	★Series 3450 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350 Series 3420



Polymeric and monomeric films are perfect for short-term and medium-term graphics including temporary signage, indoor graphics and billboards.





- ♦ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length ■ Available for special order, please refer to your Arlon Business Development Manager
- ♣1.24 m is only available in 99.94 m roll length, 1.37 m is only available in 45.72 m roll length
- ▲ Only for flat & smooth surfaces 5 years durability when used in combination with this lamination

For More Products																	
Information			FILN	4			DH	IES	IVE			SL	JRF	AC	ES		
Scan the QR-Code	DURABILITY UNPRINTED (IN YEARS)	ТҮРЕ	THICKNESS (IN MICRONS)	FINISH	PERMANENT	REMOVABLE	CLEAN REMOVING	HIGH/ULTRA TACK	AIR-EGRESS	COLOR	FLAT	SOFT CURVES	TEXTURED	LOW ENERGY SURFACES	INDOOR	OUTDOOR	APPLICATIONS
DPF 4500GLX/MLX X-Scape° TECHNOLOGY	5	Р	75	G/M	•				•	LG	•				•	•	General signage POP display Kiosk
DPF 4500GX X-Scape° TECHNOLOGY	5	Р	75	G	•				•	С	•				•	•	General signage POP display Kiosk
DPF 4500GT/MT	5	Р	75	G/M	•					LG	•				•	•	General signage POP display Kiosk
DPF 4500G WHITE/CLEAR	5	Р	75	G	•					С	•				•	•	Medium-term signage POP display Kiosk Real estate signage
DPF 4300	4	Р	86	М		•	•			С	•				•	•	General signage Medium-term signage Decals
DPF 510 ULTRA TACK	3	М	100	G/M	•			•		C LG	•				•	•	Short-term signage POP display Kiosk
DPF 510G/M	3	М	100	G/M	•					С	•				•	•	Medium-term signage POP display Kiosk Real estate signage
DPF 510GT/MT	3	М	100	G/M	•					LG	•				•	•	Medium-term signage POP display Kiosk Real estate signage
DPF 510GTR/MTR	3	М	100	G/M		•				LG	•				•	•	Short-term signage POP display Kiosk

	INK		SIZ	ZE	
SOLVENTS	NA .	LATEX	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	RECOMMENDED OVERLAMINATES
•	•	•	1.07 1.37 1.52	45.72	★Series 3420 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350
•	•	•	1.37 1.52	45.72	★Series 3420 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350
•	•	•	1.07▲ 1.37 1.52	45.72	★Series 3420 Series 3170 Series 3200 Series 3210 Series 3220 Series 3310 Series 3350
•	•	•*	1.07 \ 1.37 1.52	45.72	★Series 3420 Series 3170 Series 3200 • Series 3210 Series 3220 Series 3310 Series 3350
•	•	•	1.37	45.72	★Series 3350 ★Series 3420 Series 3170 Series 3210 Series 3220 Series 3310
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420
•		•	1.07 1.37 1.52	45.72	★Series 3510 Series 3170 Series 3420

YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**



Flat Substrate Application

At some point in time, you are going to run into a situation where you are going to have to lay out a large graphic by hand onto a flat substrate. When using the proper tools and air egress vinyl, it is going to make your

life so much easier. The flat substrate used in this

demonstration is a big aluminium panel - one of the most aggressive surfaces on which to lay a graphic. Before beginning the application, make sure your graphic is the proper size for your substrate, including a little extra on all edges for trimming. This video shows how you can use airegress vinyl to make these application projects simple and consistent.

For more videos, visit wrapitright.com

▲ 1.07 m only available in Gloss Finish - ♦ 1.07 m only available in DPF 4500 White - * Not compatible with DPF 4500 Clear - • DPF 4500 Clear only compatible with Series 3200

























32 2021 Print Media Product Brochure / arlon.com 33

Choose your Overlaminate

For More Products Information Scan the QR-Code			FILN	1		SI	ZE	RECOMMENDED VINYL									
	DURABILITY UNPRINTED (IN YEARS)		ess (ons)		RELEASE LINER	ІРТН ЕR)	NGTH ER)			6100XLP			DPF 6000RP CLEAR			ILLUMINITE WRAP"	
NAME	DURABI (IN YEAI	TYPE	THICKNESS (IN MICRONS)	FINISH	RELEAS	ROLL WIDTH (IN METER)	ROLL LENGTH (IN METER)	+»XTS	SLX" CA	DPF 610	DPF 600	DPF 600	DPF 600	FUSION WRAP	DPF 4600GLX	ILLUMIN	
SERIES 3170	7	С	35	G	Clay Coated	1.37 1.52	45.72							*	*		
SERIES 3200	7	С	50	G	Clear Synthetic	1.37 1.52	45.72	•	•	•	•	•	*	•	•	*	
SERIES 3210	7	С	35	G	Clay Coated	1.22 1.37 1.52	45.72	*	*	*	*	*	•	•	•	*	
SERIES 3220	7	С	50	G/M	Clay Coated	1.22 ▼ 1.37 1.52	45.72	•	•	*	*	*	•	•	•	*	
SERIES 3270	7	С	50	G/M	Clay Coated	1.37 1.52	45.72	•	*	•	•	•	•	•	•	•	
SERIES 3310 № *	10	PU	38	G	Clay Coated	1.37 1.52	45.72	•	*	*	*	*	•	•	•	•	
SERIES 3420	5	Р	75	G/M/S	Clay Coated	1.07 ▼ 1.37 1.52	45.72							• 🛦	• 🛦		
SERIES 3450	5	Р	80	G/M	Clay Coated	1.37 1.52	50										
SERIES 3510	ES 3510 3 M		80	G/M	Polycoated Kraft	1.37 1.52	45.72										
SERIES 3350 ANTI-GRAFFITI▶	10	PVDF	50	S	Lay-Flat Polycoated	1.37	45.72	•	•	•	•	*		•	•		
PROTEC SERIES 3960	2	М	305	G	Clear Synthetic	1.37	22.86										

[:] Recommended overlaminate: Recommended to use for primary application: Compatible overlaminate: Can be used as a secondary or alternative application

ARLON OVERLAMINATES ARE DESIGNED TO

PROTECT & GRAPHIC LIFE



The overlaminate must be the same or higher quality than the digital film. If you choose a cast vinyl, choose a cast lamination. Your work will be protected in the

best way.

DPF 2400XLP	DPF 2400	DPF 8000 ULTRA TACK WHITE	DPF 4550GTX/MTX	DPF 4550GT/MT	DPF 4550G	DPF 4300	DPF 510 ULTRA TACK	DPF 8200 HIGH TACK	DPF 8200X HIGH TACK	DPF 50WD WHITE	DPF 50WD CLEAR	DPF 45WF	DPF 4500GLX/MLX	DPF 45006X	DPF 4500GT/MT	DPF 4500G WHITE/CLEAR	DPF 510G/M	DPF 8000 ULTRA TACK CLEAR	DPF 510GTR/MTR	DPF 510GT/MT
			•	•	•	•	•						•	•	•	•	•		•	•
*	*		•	•	•						*	*	•	•	•	••		*		
*	*	•	•	•	•	•		•	•				•	•	•	•				
*	*	*	•	•	•	•		*	*				•	•	•	•				
•	•																			
•	•	•	•	•	•	•		•	•				•	•	•	•				
		*	•	•	•	*	•	*	*	*	•		*	*	*	*	•		•	•
			*	*	*															
							*										*		*	*
		•	•	•	•	*		•	•				•	•	•	•				
		*						*	*											

OUR OVERLAMINATES HAVE THE FEATURES YOU ARE LOOKING FOR



Application









Prolonged Durability

[▼]Only available in Gloss Finish - • DPF 4500 Clear only compatible with Series 3200 - Nenvironmentally Friendly - * Recommended for fleet and vehicle applications

[▲] Only for flat surfaces - • 5 years durability when used in combination with this lamination - ▶ Compatible with all Arlon vinyl films used only for flat & smooth surfaces applications

Choose your Banner

LOW COST SOLUTION FILMS ARE DESIGNED FOR YOUR

EVERYDAY PROMOTIONAL GRAPHICS

For More Products Information Scan the QR-Code			FILM				INK	SI	ZE
	LITY UNPRINTED RS)		ESS RONS)				15		:NGTH ER)
NAME	DURABILITY (IN YEARS)		THICKNESS (IN MICRONS	FINISH	OPACITY	USAGE	SOLVENTS	ROLL W (IN METI	ROLL LE (IN METE
DPF 208 •	1	Polypropylene	200	S	80%	Indoor advertising Roll-Up displays Pop-Up displays	•	0.91 1.27	30
DPF 210	1	Polyester	250	S/P	90%	Indoor advertising Roll-Up displays Pop-Up displays	•	0.91 1.27 1.52 ▼	30 50
DPF 215	1	Polyester	370	S	90%	Indoor advertising Pop-Up displays	•	0.91	30

Environmentally Friendly - ▼ Only available in 30 m roll length





ARLON PRINT PROFILE CENTER

COLOR BASE

OVER 30,000 ICC PROFILES

SCAN TO ACCESS



arlon.color-base.com



@ArlonGraphicsEMEA



@ArlonGraphicsEMEA



Arlon Graphics EMEA



Arlon Graphics







√ Notes

EUROPE - AFRICA - MIDDLE EAST

- a Dr. Lelykade 22B, 2583CM Den Haag, The Netherlands
- p +31 70 354 4311
- f +31 70 355 7721

USA

- a 200 Boysenberry Lane, Placentia, CA 92870
- P 800 232 7161/+1 714 985 6300
- f +1 714 985 6305

CHINA

- a No. 1989 Xinchang Road, Weifang, Shandong, 262400
- P +86 0536 6226568